


Frequency	50
Pole	2
Output (KW)	90
Output (HP)	125
Speed (rpm)	2930
FLC 380V (A)	163.37
FLC 400V (A)	155.2
FLC 415V (A)	149.59
Locked Rotor Current	7.5
Efficiency	93
Power Factor	0.9
Rated Torque (Nm)	293.3
Locked Rotor Torque	2
Breakdown Torque	2.3
Moment of Inertia (kgm ²)	0.7954
Noise (dbA)	94
Weight (Kg)	572

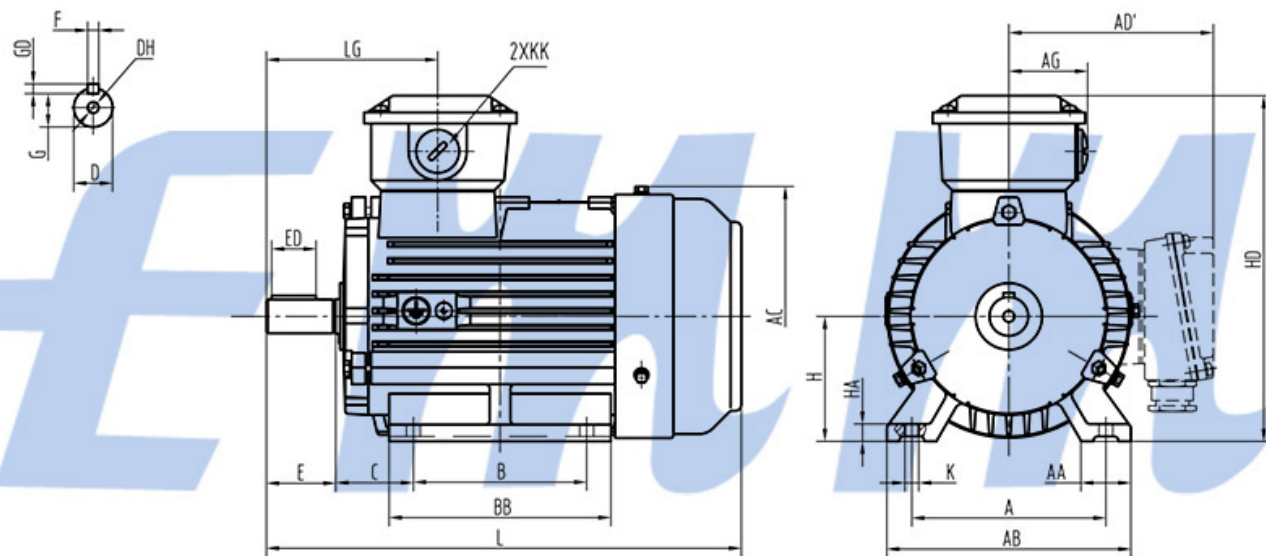

Dimension *All dimensions in mm

Mounting Type: B3

B3 Foot Mounting						Shaft				General					
H	A	B	BB	C	K	D	E	F	G	AB	AD	HD	AC	L	KK
280	457	368/419	510	190	Φ24	Φ65	140	18	58	560	395	675	Φ559	984/1035	2-M50X1.5